

Dual Check Valves FxF

2NV

DUAL CHECK VALVES FxF

The AVG Dual Check Valve is designed to prevent cross contamination of non potable water into safe drinking water.

The two spring loaded check valves remain tightly closed until there is a demand for water down stream.

In the event that there is reverse of flow direction, the check valves will close and backflow is prevented.

The AVG 2NV20-20F and 2NV25-25F Dual Check Valves provide protection in low hazard applications, like meter connections on domestic properties.




2NV20-20F



2NV25-25F

PRESSURE COMPARISON

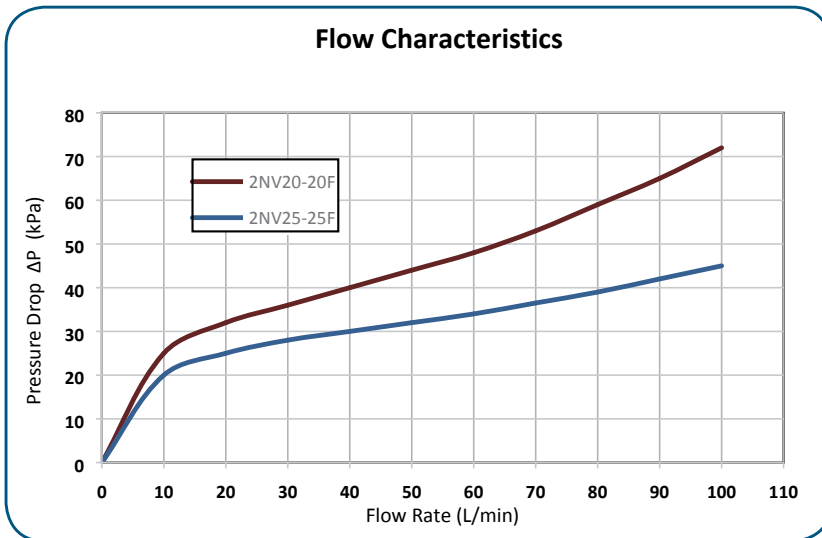

FEATURES

- D.R. Brass
- Suitable for vertical or horizontal application
- Independently operating check valves
- Maximum working pressure 1500Kpa
- Operating temperature range of 1°C to 80°C
- Approved to AS 2845-1
- Compact and Light weight
- Suitable for low Hazard applications.

DUAL CHECK VALVE SPECIFICATIONS

MODEL NO.	A	B	C
2NV20-20F	20mm	36mm	103mm
2NV25-25F	25mm	89mm	144mm

